

# SYNTHESIS AND CHARACTERIZATION OF THIN FILM NANOCOMPOSITE REVERSE OSMOSIS MEMBRANE FOR SALT AND BORON REMOVAL

CHONG CHUN YEW

UNIVERSITI TEKNOLOGI MALAYSIA

SYNTHESIS AND CHARACTERIZATION OF THIN FILM NANOCOMPOSITE  
REVERSE OSMOSIS MEMBRANE FOR SALT AND BORON REMOVAL

CHONG CHUN YEW

A thesis submitted in fulfilment of the  
requirements for the award of the degree of  
Master of Philosophy

School of Graduate Studies  
Universiti Teknologi Malaysia

AUGUST 2018

To my beloved parents and siblings

## ACKNOWLEDGEMENT

First and foremost, I would like to express my greatest gratitude to my main supervisor, Associate Professor Dr. Lau Woei Jye for his continuous guidance, suggestions, sharing and encouragement during my study. I would also like to thank my co-supervisor, Dr. Norhaniza Yusof for her advices and guidance. Without them, I believe that this thesis would not be the same as presented here.

I am also indebted to the Malaysian Ministry of Higher Education (MoHE) for financially sponsoring my study under the MyBrain15 program. Additionally, I would also like to thank the academic, research and/or support staffs from Advanced Membrane Technology Research Centre (AMTEC) and School of Graduate Studies (SPS) for lending me their helping hands throughout my study. Not to mention too the research staffs from University Industry Research Laboratory (UIRL) and Faculty of Science (FS) for their assistance in sample characterization works.

I would like to express my appreciation to all my labmates and friends. I will always remember the laughters we shared together. Unfortunately, I could not list out all the names here as this acknowledgement is not meant to be exhaustive. Lastly, I would like to express my greatest and special appreciation to my parents and siblings. Thank you for always loving, encouraging and supporting me.

## ABSTRACT

In this study, the effects of organic solvents, heat treatment methods, post-interfacial polymerization (IP) rinsing (prior to membrane heat treatment) and additives on the properties of thin film composite (TFC) membranes were investigated prior to the fabrication of thin film nanocomposite (TFN) membranes incorporated with inorganic nanomaterials. It was found that the preservation of substrate pore structures and the removal of excess monomers and organic solvent from the membrane surface are imperative to fabricate reproducible TFC membranes with consistently high water flux and salt rejection. The main findings from investigating the IP parameters are i) keeping the substrate at minimal heat exposure could prevent substrate pore collapse that potentially reduces the membrane water permeability, ii) rinsing membranes with pure n-hexane after IP resulted in membranes having higher pure water flux (PWF) without significantly decreasing solute rejection, iii) the membrane performances became practically the same after post-IP rinsing, regardless of the solvent used in the IP reaction and iv) membranes fabricated using triethylamine-camphorsulfonic acid-sodium dodecyl sulfate (TEA-CSA-SDS) additives exhibited higher PWF and salt rejection than the membranes fabricated in the absence of the additive. For the TFN membranes, it was found that nanomaterial structures (i.e., sizes and shapes) affect the separation performance of the resultant TFN membranes. Noticeably, titanium-based nanomaterial in spindle-like nanoporous structure (f-nTiO<sub>2</sub>) yielded membrane of better filtration performances than its tubular structure – functionalized titanate nanotube (f-TNT). Compared to TFN-f-TNT membrane, TFN-f-nTiO<sub>2</sub> membrane possessed greater water flux (4.26 vs. 3.36 L/m<sup>2</sup>·h·bar), NaCl (98.04 vs. 97.28%) and boron rejection (54.82 vs. 48.86%). Ultimately, the incorporation of nanomaterial into membrane selective layer was found to improve membrane water flux at the expense of NaCl and boron rejection in comparison to the TFC membranes. Surface coating of TFN membranes with polyvinyl alcohol (PVA) was found to be effective to recover membrane solute rejection, with slight reduction in water flux. The synergic effect of nanomaterial incorporation and PVA coating resulted in improved membrane water flux without trading off its solute rejection.

## ABSTRAK

Dalam kajian ini, kesan-kesan pelarut organik, kaedah rawatan haba, pembilasan pasca pempolimeran antara muka (IP) (sebelum rawatan haba) dan bahan tambahan terhadap sifat membran komposit filem nipis (TFC) telah dikaji sebelum penghasilan membran nanokomposit filem nipis (TFN) yang mengandungi bahan nano bukan organik. Ia didapati bahawa pemeliharaan struktur liang substrat dan pengeluaran monomer dan pelarut organik yang berlebihan daripada permukaan membran adalah penting bagi menghasilkan membran TFC yang boleh direproduksi dan mempunyai kebolehtelapan air dan penolakan garam yang tinggi dan konsisten. Antara penemuan utama dalam kajian parameter IP ialah i) pendedahan substrat pada rawatan haba yang minimum boleh mengelakkan keruntuhan liang substrat yang berpotensi mengurangkan kebolehtelapan air membran, ii) pembilasan membran dengan n-heksana tulen selepas IP menghasilkan membran yang mempunyai kebolehtelapan air tulen (PWF) yang lebih tinggi tanpa mengurangkan penolakan pelarut, iii) prestasi membran menjadi sama selepas pembilasan pasca IP, tidak kira jenis pelarut yang digunakan semasa reaksi IP dan iv) membran yang dihasilkan menggunakan bahan tambahan triethylamine-camphorsulfonic acid-sodium dodecyl sulfate (TEA-CSA-SDS) mempunyai PWF dan penolakan garam yang lebih tinggi berbanding membran yang dihasilkan tanpa bahan tambahan. Bagi membran TFN, didapati bahawa struktur nanomaterial (i.e., saiz dan bentuk) mempengaruhi prestasi membran. Secara ketaranya, representasi bahan nano berasas titanium dalam bentuk gelendong berliang (f-nTiO<sub>2</sub>) menghasilkan membran yang berprestasi lebih baik daripada representasinya dalam bentuk tiub (f-TNT). Berbanding dengan membran TFN-f-TNT, membran TFN-f-nTiO<sub>2</sub> mempunyai kebolehtelapan air (4.26 vs. 3.36 L/m<sup>2</sup>·h·bar), penolakan NaCl (98.04 vs. 97.28%) dan boron (54.82 vs. 48.86%) yang lebih tinggi. Akhirnya, penggabungan bahan nano ke dalam lapisan selaput membran dapat meningkatkan kebolehtelapan air membran tetapi menjejaskan penolakan NaCl dan boron. Penyalutan permukaan membran TFN dengan alkohol polivinil (PVA) didapati berkesan untuk memulihkan penolakan larut membran, dengan sedikit pengurangan pada kebolehtelapan air. Kesan sinergi daripada penggabungan bahan nano dan penyalutan dengan PVA dapat meningkatkan kebolehtelapan air membran tanpa menjejaskan penolakan larut.

## TABLE OF CONTENTS

CHAPTER	TITLE	PAGE
	DECLARATION	ii
	DEDICATION	iii
	ACKNOWLEDGEMENT	iv
	ABSTRACT	v
	ABSTRAK	vi
	TABLE OF CONTENTS	vii
	LIST OF TABLES	xi
	LIST OF FIGURES	xii
	LIST OF ABBREVIATIONS	xv
	LIST OF SYMBOLS	xvii
	LIST OF APPENDICES	xviii
 <b>1</b>	 <b>INTRODUCTION</b>	 <b>1</b>
	1.1 Background Study	1
	1.2 Saline Water Desalination	3
	1.3 Problem Statements	5
	1.4 Objectives	7
	1.5 Research Scopes	7
	1.6 Significance of the Study	9
 <b>2</b>	 <b>LITERATURE REVIEW</b>	 <b>10</b>
	2.1 Boron in the Environment	10
	2.1.1 Importance of Boron	11
	2.1.2 Regulations and Guidelines Governing Boron Concentration in Water	14

2.2	Performances of Currently Available Commercial RO Membranes	15
2.3	Current Industrial Practice for Effective Boron Removal from Saline Water	17
2.4	Methods for Enhancing Boron Rejection	19
2.4.1	Process Modification	19
2.4.2	Optimizing Feed Water Conditions	23
2.4.3	Membrane Modification	25
2.5	Factors Influencing Interfacial Polymerization Fabrication of RO Membranes	27
2.5.1	Membrane Heat Treatment Conditions	28
2.5.2	Type of Organic Solvent	31
2.5.3	Post-Interfacial Polymerization Solvent Rinsing	34
2.5.4	Use of Additives	35
2.6	Recent Development of TFN RO Membranes	36
2.6.1	Challenges in the Fabrication of TFN RO Membranes	38
2.6.2	Approaches in Overcoming the Challenges	38
2.7	Overview and Research Gaps	40
<b>3</b>	<b>RESEARCH METHODOLOGY</b>	43
3.1	Research Design	43
3.2	Chemicals and Reagents	43
3.3	Preparation of Thin Film Composite Membrane	45
3.3.1	Fabrication of Thin Film Composite Membrane (without Additives)	46
3.3.2	Fabrication of Thin Film Composite Membrane (with Additives)	48
3.4	Preparation of Surface Functionalized Titanium-Based Nanomaterials	48



3.4.1	Synthesis of Nanoporous Titanium Oxide (nTiO <sub>2</sub> )	48
3.4.2	Synthesis of Titanate Nanotube (TNT)	49
3.4.3	Surface Functionalization of Nanomaterials	49
3.4.4	Fabrication of Thin Film Nanocomposite Membrane	50
3.5	Membrane Surface Coating	51
3.6	Characterization Works	52
3.6.1	X-ray Diffraction (XRD)	52
3.6.2	Fourier Transform Infrared Analysis (FTIR)	52
3.6.3	Transmission Electron Microscopy (TEM)	53
3.6.4	Field Emission Scanning Electron Microscopy (FESEM)	53
3.6.5	Atomic Force Microscopy (AFM)	53
3.6.6	Membrane Wettability Analysis	54
3.7	Membrane Performance Evaluation	54
<b>4</b>	<b>RESULTS AND DISCUSSION</b>	<b>56</b>
4.1	Fabrication of TFC RO Membrane: Influence of Thermal Treatment Methods, Rinsing Treatments and Use of Additives	56
4.1.1	Membrane Characterization	56
4.1.2	Membrane Performance Evaluation	58
4.1.3	Membrane Uniformity and Reproducibility	61
4.1.4	Effect of Post-IP Treatment on Membrane Performance	63
4.1.5	Performance Comparison for TFC Membranes Fabricated with and without Additives	69

4.2	Fabrication of TFN RO Membrane: Role of Nanomaterial Structures and Surface Coating	70
4.2.1	Characterization of Nanomaterials	70
4.2.2	Comparison between TFC and TFN Membranes	74
4.2.2.1	Changes in Membrane Physicochemical Properties	74
4.2.2.2	Membrane Water Permeance and NaCl Rejection	78
4.2.2.3	Boron Rejection of TFN Membranes	80
4.2.2.4	Membrane Coating with PVA	80
<b>5</b>	<b>GENERAL CONCLUSION AND RECOMMENDATIONS FOR FUTURE WORKS</b>	<b>85</b>
5.1	General Conclusion	85
5.2	Recommendations for Future Work	87
	<b>REFERENCES</b>	<b>89</b>
	Appendix A–C	96–101

## LIST OF TABLES

<b>TABLE NO.</b>	<b>TITLE</b>	<b>PAGE</b>
2.1	Boron tolerance of various crops (Tu <i>et al.</i> , 2010).	13
2.2	Permissible level of boron in water for drinking and irrigation purposes in various countries/ regions.	15
2.3	Filtration performances of commercial SWRO membranes.	16
2.4	Properties of various organic solvents.	31
3.1	Heat treatment methods used during TFC membrane fabrication.	47
3.2	IP conditions for the formation of TFC membranes.	48
4.1	Comparison between the properties of organic solvents used in this work.	64
4.2	Performance comparison for the membranes fabricated with various organic solvents.	65
4.3	Membrane contact angles and surface corrected solid-liquid interfacial free energy values.	78
4.4	Water contact angle and roughness corrected solid-liquid interfacial free energy of coated and uncoated TFC and TFN-f-TNT membranes.	83

## LISTS OF FIGURES

FIGURE NO.	TITLE	PAGE
1.1	Estimated and projected trends of total blue water withdrawal, sectoral blue water consumption and total groundwater abstraction over the period from 1960 to 2100 (Wada and Bierkens, 2014).	2
1.2	Water stress by country (Luo <i>et al.</i> , 2015).	3
1.3	Distribution of total world installed capacity by technology (Burn <i>et al.</i> , 2015).	4
2.1	Molecular structure of boric acid.	17
2.2	Schematic diagram of a two-pass reverse osmosis system (Tiraferri, 2014).	18
2.3	Complexation of boric acid and borate ions with polyols (Dydo <i>et al.</i> , 2012).	20
2.4	Cascade process design (Faigon and Hefer, 2008).	20
2.5	Integrated membrane filtration and ion exchange process (Kabay <i>et al.</i> , 2013).	22
2.6	Concurrent desalination and boron removal (CDBR) process (Kürklü <i>et al.</i> , 2017).	23
2.7	Filtration IP technique for the fabrication of TFN membranes (Lai <i>et al.</i> , 2017).	39
3.1	Research design and planning.	44
3.2	Experimental setup for nanofiller's surface functionalization.	50
4.1	Surface morphology (magnification of 10k) and cross-sectional views (magnification of 50k) of TFC-A (a, b), TFC-B (c, d) and TFC-C (e, f). For cross-	

	sectional views (b, d and f), value given refers to the average PA layer thickness, <i>d</i> .	57
4.2	Static contact angles (under dynamic mode) for TFC-A, TFC-B and TFC-C membrane.	58
4.3	Membrane performance comparison for TFC-A, TFC-B and TFC-C.	58
4.4	The surface of (a) commercial PSf substrate and (b-d) TFC membranes observed under fluorescent light (each membrane was reproduced three times at different days).	62
4.5	Performance comparison of the TFC membranes made of different batches, a) TFC-B and b) TFC-C.	63
4.6	Static contact angles (under dynamic mode) for membranes made with various types of organic solvents, with (lighter lines) and without (darker lines) post-IP rinsing.	67
4.7	Membrane performance enhancement or deterioration following post-IP rinsing with pure n-hexane.	67
4.8	FESEM images of the membrane surfaces without and with post-IP rinsing using pure n-hexane, (a,b) TFC-hex / TFC-hex-r, (c,d) TFC-hep / TFC-hep-r, (e,f) TFC-cyclo / TFC-cyclo-r and (g,h) TFC-isopar / TFC-isopar-r (Magnification of 20k).	68
4.9	Performance comparison for TFC membranes fabricated with and without additives.	70
4.10	Characterization of self-synthesized nTiO <sub>2</sub> , (a and b) TEM images and (c) XRD plot.	71
4.11	Characterization of TNTs, (a and b) TEM images and (c) XRD plot.	72
4.12	FTIR spectra of unmodified (nTiO <sub>2</sub> ) and modified nanoporous TiO <sub>2</sub> (f-nTiO <sub>2</sub> ).	73

4.13	Dispersion quality of (a) $\text{nTiO}_2$ and (b) $\text{f-nTiO}_2$ in isopar after (i) 0 min, (ii) 2 min, (iii) 5 min, (iv) 10 min and (v) 30 min.	74
4.14	FTIR spectra of TFC and TFN membranes.	75
4.15	FESEM (left) and AFM (right) images of (a and b) TFC, (c and d) TFN- $\text{f-nTiO}_2$ and (e and f) TFN- $\text{f-TNT}$ membranes. Observation of one of the protuberances on the surface of TFN- $\text{f-nTiO}_2$ under 20,000 magnifications (scale bar: 200 nm) is given as the inset in (c).	76
4.16	PWF, NaCl and boron rejection of TFC and TFN membranes.	79
4.17	FESEM images of uncoated (left) and coated (right) membranes for (a, b) TFC membrane and (c, d) TFN- $\text{f-TNT}$ membrane.	82
4.18	FTIR spectra of uncoated and coated TFC and TFN- $\text{f-TNT}$ membranes.	82
4.19	Membrane filtration performances before and after PVA coating. (a) PWF and (b) NaCl and boron rejection.	84

## LIST OF ABBREVIATIONS

AAPTS	-	1-(2-Amino-ethyl)-3-aminopropyl trimethoxysilane
AFM	-	Atomic force microscopy
ATR	-	Attenuated-total-reflectance
BET	-	Brunauer-Emmett-Teller
BWRO	-	Brackish water reverse osmosis
CA	-	Cellulose acetate
CaCl <sub>2</sub>	-	Calcium chloride
CDBR	-	Concurrent desalination and boron removal
CFIC	-	5-chloroformyloxyisophthaloyl chloride
CNT	-	Carbon nanotube
CSA	-	Camphorsulfonic acid
ED	-	Electrodialysis
EDBSA	-	4,4'-(1,2-ethanediyl-diimino)bis(benzenesulfonic acid)
EDR	-	Electrodialysis with polarity reversal
EDI	-	Electrodeionization
EERO	-	Energy efficient reverse osmosis
FESEM	-	Field emission scanning electron microscopy
FTIR	-	Fourier transmission infrared spectroscopy
f-nTiO <sub>2</sub>	-	Functionalized nanoporous titanium oxide
f-TNT	-	Functionalized titanate nanotube
GA	-	Glutaraldehyde
GO	-	Graphene oxide
HCl	-	Hydrochloric acid
HNT	-	Halloysite nanotube
IP	-	Interfacial polymerization
IPC	-	Isophthaloyl dichloride
KBr	-	Potassium bromide

MED	-	Multiple effect distillation
MMM	-	Mixed matrix membrane
MPD	-	M-phenylenediamine
MSF	-	Multistage flash distillation
NaCl	-	Sodium chloride
N,N'-DMMPD	-	N,N'-dimethyl-m-phenylenediamine
NaOH	-	Sodium hydroxide
NF	-	Nanofiltration
nTiO <sub>2</sub>	-	Nanoporous titanium oxide
PA	-	Polyamide
PES	-	Polyethersulfone
PIP	-	Piperazine
PVA	-	Polyvinyl alcohol
PSf	-	Polysulfone
PWF	-	Pure water flux
RO	-	Reverse osmosis
SDS	-	Sodium dodecyl sulfate
SIP	-	Sequential interfacial polymerization
SR	-	Sulfate removal
SSRO	-	Single stage reverse osmosis
SWRO	-	Seawater reverse osmosis
TEA	-	Triethylamine
TEM	-	Transmission electron microscopy
TFC	-	Thin film composite
TFN	-	Thin film nanocomposite
TiO <sub>2</sub>	-	Titanium oxide
TMC	-	Trimesoyl chloride
TNT	-	Titanate nanotube
UF	-	Ultrafiltration
WHO	-	World Health Organization
XRD	-	X-ray diffraction



## LIST OF SYMBOLS

$A_m$	-	Effective membrane surface area
$C_f$	-	Solute concentration in the feed solution
$C_p$	-	Solute concentration in the permeate solution
$J$	-	Membrane water flux
$MW_{GA}$	-	Molecular weight of GA
$MW_{PVAunit}$	-	Molecular weight of one PVA unit
$\rho$	-	Density
$R$	-	Membrane solute rejection
$R_{ms}$	-	Membrane root mean square roughness
$V$	-	Volume of permeate collected
$W_{GA}$	-	Weight of GA
$W_{PVA}$	-	Weight of PVA
$X$	-	Crosslinking degree of PVA
$\gamma_L$	-	Liquid surface tension
$Y$	-	Surface tension
$\Delta t$	-	Experimental time for permeate collection
$\mu$	-	Viscosity
$\theta$	-	Equilibrium contact angle value
$\Delta$	-	Relative membrane surface area
$-\Delta G_{SL}$	-	Surface corrected solid-liquid interfacial free energy

**LIST OF APPENDICES**

<b>APPENDIX.</b>	<b>TITLE</b>	<b>PAGE</b>
A	Student-t test analysis on the significance of membrane heating methods towards membrane pure water flux, salt and boron rejection	96
B	Student-t test analysis on the significance of post-IP treatment towards membrane pure water flux, salt and boron rejection	98
C	List of publications and list of attended conference	101


## **CHAPTER 1**

### **INTRODUCTION**

#### **1.1 Background Study**

Mankind has long been relying on natural freshwater resources for water supply. In ancient time, mankind withdrew water from the nature (i.e., rivers, lakes and groundwater aquifers) for domestic uses and irrigation purposes. Today, although the practice of sourcing water from the nature remains unchanged, the amount of water withdrawn has certainly increased, given i) the need to supply an appreciable amount of water to the industrial and manufacturing sectors, in addition to domestic uses and irrigation purposes as well as ii) the need to meet the needs of the ever-growing world population. In view of this, it may be reasonable to assume that the total water withdrawal from the nature will continue to rise in the future.


To put things into perspective, Wada and Bierkens (2014) estimated and projected the trends for total global water withdrawal, sectoral water consumption as well as groundwater abstraction from the 1960s to the 2100s, as shown in Figure 1.1. It can be seen that the total water withdrawal has increased remarkably from the 1960s until 2010, which is in line with the increase in sectoral water consumption. Moreover, it is projected that the sectoral water consumption and total water withdrawal will continue to rise, with no sign of levelling off until 2100.

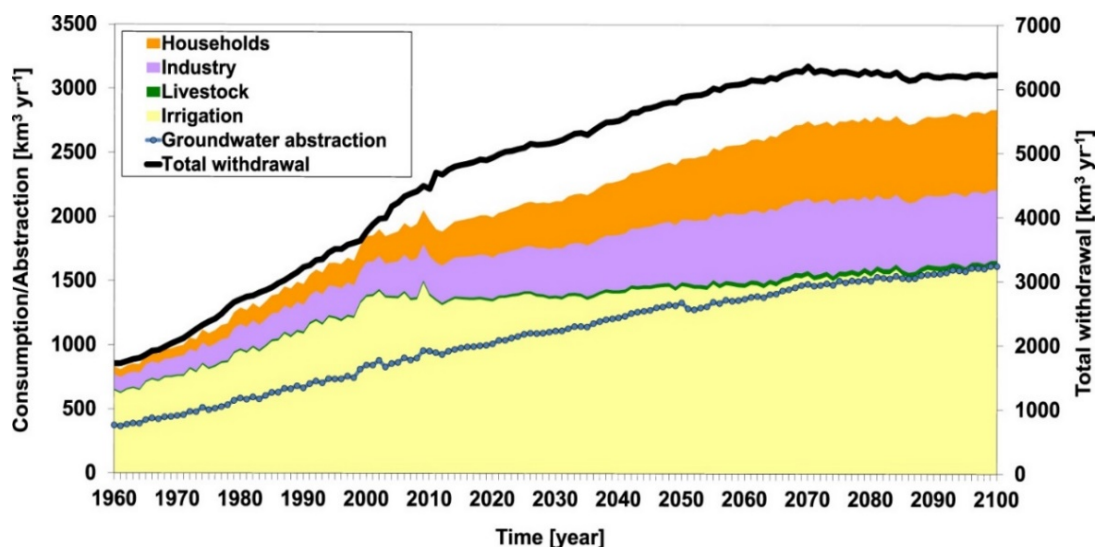

**Figure 1.1:** Estimated and projected trends of total blue water withdrawal, sectoral blue water consumption and total groundwater abstraction over the period from 1960 to 2100 (Wada and Bierkens, 2014).

Nonetheless, it is worth noting that freshwater supplies from the nature are finite, as only 0.007% of the total water on Earth is readily accessible by mankind. Additionally, it is also interesting to note that only 30% of the extracted water goes back directly into the surface waterways or groundwater, whereas the balance is either lost or consumed, thereby requiring wastewater treatment (Kürklü *et al.*, 2017). Under these circumstances, when the water withdrawal rate is approaching the nature's self-replenishing rate, it may lead to an increase in water stress worldwide. Figure 1.2 depicts the water stress by country as projected by Luo *et al.* (2015) based on a series of reported and modelled global datasets. It clearly shows that more than half of the countries worldwide may experience critical water stress by year 2040 due to high water withdrawal and consumption rates.

In addition to high water withdrawal, the occurrence of climate change, as well as the pollution of freshwater sources due to anthropogenic activities are generally perceived as the contributing factors that will greatly reduce freshwater availability in years to come. In this regard, key players in the water industries should opt for more promising methods to augment the supply of freshwater, one of which is to tap on the unconventional water source – the ocean.

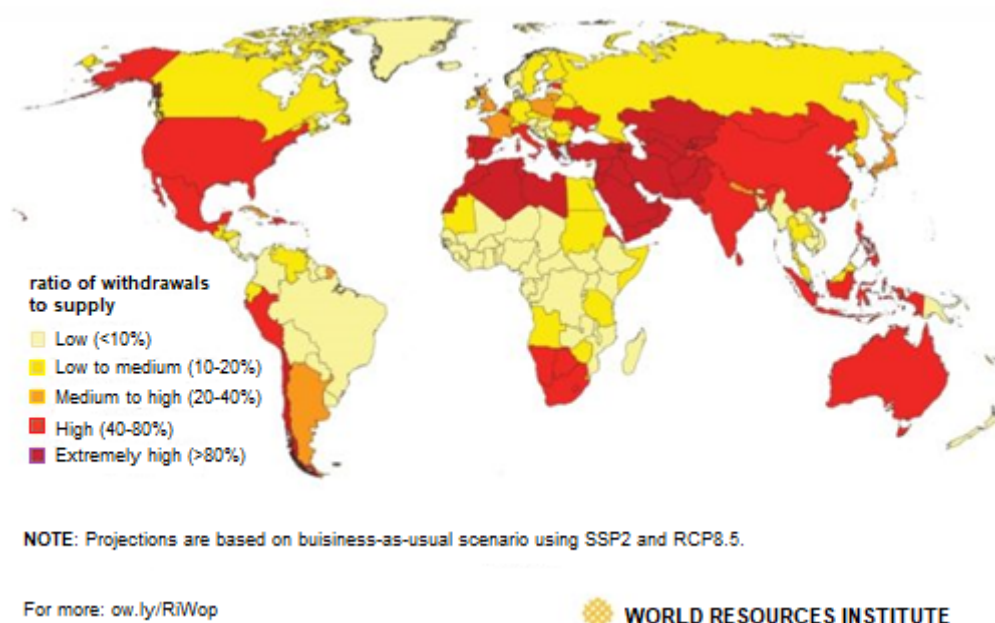


**Figure 1.2:** Water stress by country (Luo *et al.*, 2015).

## 1.2 Saline Water Desalination

Over the years, there are two main technologies developed to desalinate saline water, which are the thermal and membrane technologies. These technologies have been proven to successfully remove >99% of salt from saline water, hence demonstrating the practicability of converting saline water into freshwater. For thermal technologies such as multi-stage flash and multi-effect distillation, desalination is achieved by heating saline water in a series of low pressure chambers and condensing water vapor into pure water. On the other hand, membrane technologies such as nanofiltration (NF) and reverse osmosis (RO) produce freshwater by pressurizing saline water through a series of thin sheet membranes that are capable of filtering out dissolved salts while allowing water molecules to pass through.

Although both methods are capable of desalinating saline water, membrane technologies are currently preferred over the thermal technologies. This is due to the recent cost hike in energy production, which renders thermal technology a costly method for freshwater production. Furthermore, extensive research in membrane

development has greatly reduce the cost for saline water desalination using membrane technologies. As of 30<sup>th</sup> June 2015, there are a total of 18,426 desalination plants installed across 150 countries worldwide, producing a sum of 22.9 billion US gallons of freshwater to support the usage of more than 300 million people (International Desalination Association, 2015). It is worth nothing that out of the total desalination plants installed, >60% are operating based on the RO technology (Figure 1.3).

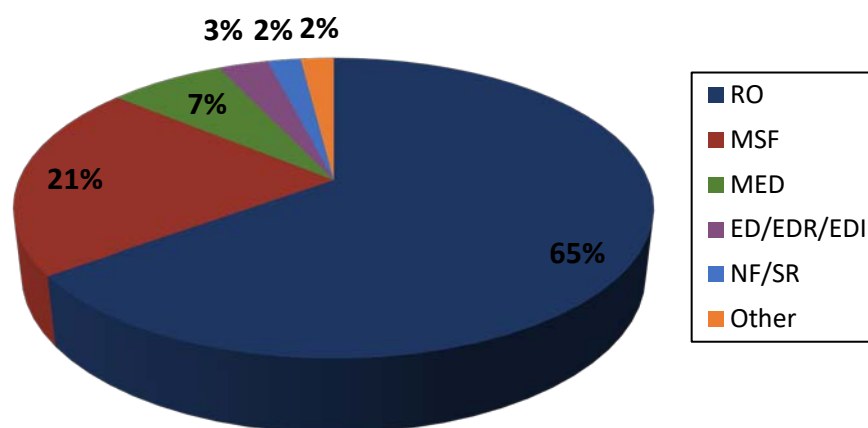

**Figure 1.3:** Distribution of total world installed capacity by technology (Burn *et al.*, 2015).

Current state-of-the-art membrane desalination plants are utilizing thin film composite (TFC) membranes for saline water desalination via RO processes. This type of membrane was firstly introduced by Cadotte and his colleagues back in the 1970s (Cadotte *et al.*, 1980) and has since made saline water desalination a feasible process worldwide. To date, TFC membrane serves as the benchmark for membrane development owing to i) its superior salt separating capabilities at a relatively high water permeability, ii) high pH, temperature and chemical tolerance, iii) high mechanical strength and iv) the possibility of optimizing the selective and support layers independently for desired performance enhancements. Nevertheless, further membrane improvements with respect to its water permeability (without jeopardizing its solute rejection capabilities), fouling and chlorine resistance are necessary to further improve the economics of the membrane desalination processes.

In the recent years, research spotlight for membrane development has been focused on the development of thin film nanocomposite (TFN) membranes that was introduced by Jeong and his colleagues back in year 2007 (Jeong *et al.*, 2007). TFN membranes were reported to exhibit higher water permeability at similar salt rejection as the TFC membranes. Additionally, some TFN membranes were also demonstrated to exhibit better fouling and chlorine resistance. Albeit the enhanced separation performance of TFN membranes, there remains some rooms for improvements in its fabrication process as elucidated in the next sub-section.

### 1.3 Problem Statements

Both TFC and TFN membranes are fabricated using interfacial polymerization (IP) approach. In brief, IP process involves i) the contact and reaction of two monomers (an amine monomer (dissolved in water) and an acyl chloride monomer (dissolved in organic solvent)) atop a microporous support, thus forming the polyamide selective layer, followed by ii) membrane heat treatment to promote further membrane cross-linking and the removal of excess solvent. For the fabrication of TFN membranes, hydrophilic nanomaterials are commonly dispersed in the aqueous phase prior to the IP process. Nevertheless, it was demonstrated by Huang *et al.* (2013) that the dispersion of nanomaterial in the organic phase yielded membrane of better filtration performances in comparison to membrane formed by dispersing nanomaterial in the aqueous phase. However, the dispersion of hydrophilic nanomaterial in the organic solvent remains challenging owing to their incompatibilities.

To improve the dispersion of hydrophilic nanomaterials in organic solvent, Emadzadeh *et al.* (2015) and Lai *et al.* (2016) replaced the commonly used organic solvent (n-hexane) with cyclohexane in the membrane fabrication process. According to the authors, nanomaterials tended to disperse better in organic solvents of higher boiling point and viscosity. In view of this, Isoparaffin-G, an organic solvent with viscosity and boiling point even higher than cyclohexane could potentially be used for

even better nanomaterial dispersion. However, the effects of organic solvents on the separation performances of TFC membrane must be studied prior to the fabrication of TFN membranes. This is because both the IP reaction and membrane heat treatment conditions are dependent on the properties of the organic solvent (i.e., surface tension, viscosity and boiling point). Therefore in the first part of this study, the effects of organic solvent are investigated by fabricating a series of TFC membranes using four different types of organic solvents. Alongside the study of organic solvent, membrane heat treatment methods, post-IP treatment (prior to heat treatment) and the usage of additives are also investigated. It is anticipated that highly reproducible TFC membranes could be fabricated and serve as a stable baseline for comparison with the TFN membranes in the second part of this study.

For the fabrication of TFN membranes, some general basis for the selection of new nanomaterial in the fabrication of TFN membranes could be formulated with reference to the findings published in the literature. Generally, the nanomaterial should be i) highly hydrophilic, ii) negatively charged and iii) possessing pores or water channels. In addition to these criteria, it is worth noting that structure of the nanomaterial (i.e., size and shape) should also be taken into consideration. The effects of nanomaterial structure (same material with similar shapes but different sizes) on membrane performance was previously reported by Lind *et al.* (2009). Meanwhile, the effects of nanomaterial structure (considering same material with different sizes and shapes) on membrane performance, however, has not been discussed in the past.

In the second part of this study, experimental works are planned systematically to investigate the effects of nanomaterial structure (different sizes and shapes) on membrane separation performance. Additionally, membrane surface coating is studied to minimize surface defects that is likely to occur following the incorporation of nanomaterials. In addition to membrane water flux and salt rejection, boron rejection of all TFC and TFN membranes are evaluated to study the practicability of utilizing TFN membranes for saline water desalination.



## 1.4 Objectives

Looking at the research problems stated in the previous sub-section, the following objectives are formulated:

1. To study the effects of organic solvents, heat treatment methods, post-interfacial polymerization solvent rinsing and additives on the physicochemical properties and performance of TFC RO membranes for salt and boron removal.
2. To investigate the effects of nanomaterial structures and surface coating on salt and boron rejection of TFN RO membranes.

## 1.5 Research Scopes

To achieve the objectives of this study, the following scope of works are planned:

1. Fabricating TFC membranes via interfacial polymerization of MPD (2.0 wt/v%) and TMC (0.1 wt/v%) under three different heat treatment methods. These methods differ from one and another with respect to the total membrane surfaces exposed to heat treatment. In Method A, both the polyamide (PA) and substrate layer will be exposed to heat treatment. Comparatively, only the PA layer will be heat treated in Method B and C.
2. Characterizing the membrane surface hydrophilicity and morphology of TFC membranes formed in (1) using contact angle goniometer, field emission scanning electron microscopy (FESEM) as well as filtration performance against 2000 mg/L single salt solution (NaCl and/or CaCl<sub>2</sub>) and 5 mg/L boric acid aqueous solution.
3. Fabricating two series of TFC membranes using four types of organic solvents (n-hexane, n-heptane, cyclohexane and Isoparaffin-G) by adopting the best heat treatment method discovered in (2). The TFC membranes are fabricated

by keeping one series of the membranes rinsed with pure n-hexane (prior to post-IP heat treatment) while another series without post-IP rinsing.

4. Fabricating TFC membrane by adding additives in the aqueous phase during membrane fabrication process for comparison with the best membrane obtained in (2).
5. Characterizing physicochemical properties and filtration performance of TFC membranes fabricated in (3) and (4).
6. Synthesizing nanoporous titanium oxide ( $\text{nTiO}_2$ ) and titanate nanotube (TNT) using solvothermal and hydrothermal methods, respectively, followed by surface functionalization using 1-(2-amino-ethyl)-3-aminopropyl trimethoxysilane.
7. Characterizing the physicochemical properties of the synthesized nanomaterials using Fourier-transform infrared spectroscopy (FTIR), transmission electron microscopy (TEM) and X-ray diffraction (XRD).
8. Fabricating TFN membranes by incorporating self-synthesized nanomaterials (at a fixed loading of 0.05 wt/v%) into membrane PA selective layer under the best IP conditions found in (5). Coating TFN membranes using 0.1 wt% polyvinyl alcohol (PVA) to heal possible defects formed following the incorporation of nanomaterials.
9. Characterizing possible changes to membrane surface roughness, morphology, functional groups and hydrophilicity following the incorporation of nanomaterials using atomic force microscopy (AFM), FESEM, FTIR and contact angle measurements. Evaluating membrane filtration performance against 2000 mg/L NaCl and 5 mg/L boric acid aqueous solution.

## **1.6 Significance of the Study**

In the recent years, TFN membranes have been extensively studied for saline water desalination. Published research works have demonstrated improved membrane separation performances upon the incorporation of nanomaterials in the membrane selective layer. Nevertheless, there remains several challenges in the fabrication process of TFN membranes. These challenges and research gaps form the basis of this study. It is envisaged that the study on the role of nanomaterial structures would allow membrane researchers to form better basis for the selection of novel nanomaterial for TFN membrane fabrication. Also, it is anticipated that the study of TFC and TFN membrane fabrication conditions as well as membrane surface coating would contribute to the fabrication of TFN membranes with consistent and superior separation performances for saline water desalination, thereby reducing the cost of saline water desalination. Furthermore, this study would allow membrane researchers to understand the effects of nanomaterials incorporation in TFN membrane boron rejection and the practicability of utilizing TFN membranes in saline water desalination.

## REFERENCES

- Ben-Sasson, M., Lu, X., Nejati, S., Jaramillo, H., and Elimelech, M. (2016). In situ surface functionalization of reverse osmosis membranes with biocidal copper nanoparticles. *Desalination*, **388**, 1-8.
- Bernstein, R., Belfer, S., and Freger, V. (2011). Toward improved boron removal in RO by membrane modification: Feasibility and challenges. *Environmental Science & Technology*, **45**, 3613-3620.
- Burn, S., Hoang, M., Zarzo, D., Olewniak, F., Campos, E., Bolto, B., and Barron, O. (2015). Desalination techniques – A review of the opportunities for desalination in agriculture. *Desalination*, **364**, 2-16.
- Cadotte, J.E., Petersen, R.J., Larson, R.E., and Erickson, E.E. (1980). A new thin-film composite seawater reverse osmosis membrane. *Desalination*, **32**, 25-31.
- Cengeloglu, Y., Arslan, G., Tor, A., Kocak, I., and Dursun, N. (2008). Removal of boron from water by using reverse osmosis. *Separation and Purification Technology*, **64**, 141-146.
- Bidsorkhi, H.C., Riazi, H., Emadzadeh, D., Ghanbari, M., Matsuura, T., Lau, W.J., and Ismail, A.F. (2016). Preparation and characterization of a novel highly hydrophilic and antifouling polysulfone/nanoporous TiO<sub>2</sub> nanocomposite membrane. *Nanotechnology*, **27**, 415706.
- Choi, W., Jeon, S., Kwon, S.J., Park, H., Park, Y.-I., Nam, S.-E., Lee, P.S., Lee, J.S., Choi, J., Hong, S., Chan, E.P., and Lee, J.-H. (2017). Thin film composite reverse osmosis membranes prepared via layered interfacial polymerization. *Journal of Membrane Science*, **527**, 121-128.
- Chong, T.H., Loo, S.-L., and Krantz, W.B. (2015). Energy-efficient reverse osmosis desalination process. *Journal of Membrane Science*, **473**, 177-188.
- Chong, C.Y., Lau, W.J., Yusof, N., Lai, G.S., Othman, N.H., Matsuura, T., and Ismail, A.F. (2018). Studies on the properties of RO membranes for salt and boron removal: Influence of thermal treatment methods and rinsing treatments. *Desalination*, **428**, 218-226.

- Dalvi, V., Tang, Y.P., Staudt, C., and Chung, T.S. (2017). Influential effects of nanoparticles, solvent and surfactant treatments on thin film nanocomposite (TFN) membranes for seawater desalination. *Journal of Membrane Science*, **420**, 216-225.
- Di Vincenzo, M., Barboiu, M., Tiraferri, A., and Legrand, Y.M. (2017). Polyol-functionalized thin-film composite membranes with improved transport properties and boron removal in reverse osmosis. *Journal of Membrane Science*, **540**, 71-77.
- Duan, J., Pan, Y., Pacheco, F., Litwiller, E., Lai, Z., and Pinnau, I. (2015). High-performance polyamide thin-film-nanocomposite reverse osmosis membranes containing hydrophobic zeolitic imidazolate framework-8. *Journal of Membrane Science*, **476**, 303-310.
- Dydo, P., Nemš, I., and Turek, M. (2012). Boron removal and its concentration by reverse osmosis in the presence of polyol compounds. *Separation and Purification Technology*, **89**, 171-180.
- Emadzadeh, D., Lau, W.J., Rahbari-Sisakht, M., Daneshfar, A., Ghanbari, M., Mayahi, A., Matsuura, T., and Ismail, A.F. (2015). A novel thin film nanocomposite reverse osmosis membrane with superior anti-organic fouling affinity for water desalination. *Desalination*, **368**, 106-113.
- Faigon, M., and Hefer, D. (2008). Boron rejection in SWRO at high pH conditions versus cascade design. *Desalination*, **223**, 10-16.
- Farhat, A., Ahmad, F., Hilal, N., and Arafat, H.A. (2013). Boron removal in new generation reverse osmosis (RO) membranes using two-pass RO without pH adjustment. *Desalination*, **310**, 50-59.
- Geffen, N., Semiat, R., Eisen, M.S., Balazs, Y., Katz, I., and Dosoretz, C.G. (2006). Boron removal from water by complexation to polyol compounds. *Journal of Membrane Science*, **286**, 45-51.
- Ghanbari, M., Emadzadeh, D., Lau, W.J., Matsuura, T., and Ismail, A.F. (2015). Synthesis and characterization of novel thin film nanocomposite reverse osmosis membranes with improved organic fouling properties for water desalination. *RSC Advances*, **5**, 21268-21276.
- Ghosh, A.K., Jeong, B.-H., Huang, X., and Hoek, E.M.V. (2008). Impacts of reaction and curing conditions on polyamide composite reverse osmosis membrane properties. *Journal of Membrane Science*, **311**, 34-45.

- Guan, Z., Lv, J., Bai, P., and Guo, X. (2016). Boron removal from aqueous solutions by adsorption – A review. *Desalination*, **383**, 29-37.
- Güler, E., Kabay, N., Yüksel, M., Yavuz, E., and Yüksel, Ü. (2011). A comparative study for boron removal from seawater by two types of polyamide thin film composite SWRO membranes. *Desalination*, **273**, 81-84.
- Güler, E., Kaya, C., Kabay, N., and Arda, M. (2015). Boron removal from seawater: State-of-the-art review. *Desalination*, **356**, 85-93.
- Hermans, S., Bernstein, R., Volodin, A., and Vankelecom, I.F.J. (2015). Study of synthesis parameters and active layer morphology of interfacially polymerized polyamide-polysulfone membranes. *Reactive & Functional Polymers*, **86**, 199-208.
- Hilal, N., Kim, G.J., and Somerfield, C. (2011). Boron removal from saline water: A comprehensive review. *Desalination*, **273**, 23-35.
- Hofs, B., Schurer, R., Harmsen, D.J.H., Ceccarelli, C., Beerendonk, E.F., and Cornelissen, E.R. (2013). Characterization and performance of a commercial thin film nanocomposite seawater reverse osmosis membrane and comparison with a thin film composite. *Journal of Membrane Science*, **446**, 68-78.
- Hu, J., Pu, Y., Ueda, M., Zhang, X., and Wang, L. (2016). Charge-aggregate induced (CAI) reverse osmosis membrane for seawater desalination and boron removal. *Journal of Membrane Science*, **520**, 1-7.
- Huang, H., Qu, X., Dong, H., Zhang, L., and Chen, H. (2013). Role of NaA zeolites in the interfacial polymerization process towards a polyamide nanocomposite reverse osmosis membrane. *RSC Advances*, **3**, 8203-8207.
- International Desalination Association. (2015). Desalination by numbers. Retrieved from <http://idadesal.org/desalination-101/desalination-by-the-numbers/>.
- Jegal, J., Min, S.G., and Lee, K.-H. (2002). Factors affecting the interfacial polymerization of polyamide active layers for the formation of polyamide composite membranes. *Journal of Applied Polymer Science*, **86**, 2781-2787.
- Jeong, B.-H., Hoek, E.M.V., Yan, Y., Subramani, A., Huang, X., Hurwitz, G., Ghosh, A.K., and Jawor, A. (2007). Interfacial polymerization of thin film nanocomposites: A new concept for reverse osmosis membranes. *Journal of Membrane Science*, **294**, 1-7.
- Kabay, N., Bryjak, M., Schlosser, S., Kitis, M., Avlonitis, S., Matejka, Z., Al-Mutaz, I., and Yüksel, M. (2008). Adsorption-membrane filtration (AMF) hybrid

- process for boron removal from seawater: an overview. *Desalination*, **223**, 38-48.
- Kabay, N., Köseoğlu, P., Yavuz, E., Yüksel, Ü., and Yüksel, M. (2013). An innovative integrated system for boron removal from geothermal water using RO process and ion exchange-ultrafiltration hybrid method. *Desalination*, **316**, 1-7.
- Karimi, H., Bajestani, M.B., Mousavi, S.A., and Garakani, R.M. (2017). Polyamide membrane surface and bulk modification using humid environment as a new heat curing medium. *Journal of Membrane Science*, **523**, 129-137.
- Kezia, K., Lee, J., Hill, A.J., and Kentish, S.E. (2013). Convective transport of boron through a brackish water reverse osmosis membrane. *Journal of Membrane Science*, **445**, 160-169.
- Kim, K.J., Lee, S.-B., and Han, N.-W. (1994). Kinetics of crosslinking reaction of PVA membrane with glutaraldehyde. *Korean Journal of Chemical Engineering*, **11**(1), 41-47.
- Kürklü, S., Velioğlu, S., Ahunbay, M.G., Tantekin-Ersolmaz, S.B., and Krantz, W.B. (2017). A novel energy-efficient concurrent desalination and boron removal (CDBR) process. *Desalination*, **423**, 79-94.
- La, Y.-H., Diep, J., Al-Rasheed, R., Miller, D., Krupp, L., Geise, G.M., Vora, A., Davis, B., Nassar, M., Freeman, B.D., McNeil, M., and Dubois, G. (2013). Enhanced desalination performance of polyamide bi-layer membranes prepared by sequential interfacial polymerization. *Journal of Membrane Science*, **437**, 33-39.
- Lai, G.S., Lau, W.J., Gray, S.R., Matsuura, T., Jamshidi Gohari, R., Subramanian, M.N., Lai, S.O., Ong, C.S., Ismail, A.F., Emadzadeh, D., and Ghanbari, M. (2016). A practical approach to synthesize polyamide thin film nanocomposite (TFN) membranes with improved separation properties for water/ wastewater treatment. *Journal of Materials Chemistry A*, **4**, 4134-4144.
- Lai, G.S., Lau, W.J., Goh, P.S., Tan, Y.H., Ng, B.C., and Ismail, A.F. (In press). A novel interfacial polymerization approach towards synthesis of graphene oxide-incorporated thin film nanocomposite membrane with improved surface properties. *Arabian Journal of Chemistry*. doi: 10.1016/j.arabjc.2017.12.009.
- Lau, W.J., Gray, S., Matsuura, T., Emadzadeh, D., Paul Chen, J., and Ismail, A.F. (2015). A review on polyamide thin film nanocomposite (TFN) membranes: History, applications, challenges and approaches. *Water Research*, **80**, 306-324.

- Lide, D.R. (2003–2004). Handbook of Chemistry and Physics (84<sup>th</sup> ed.). CRC Press.
- Lind, M.L., Ghosh, A.K., Jawor, A., Huang, X., Hou, W., Yang, Y., and Hoek, E.M.V. (2009). Influence of zeolite crystal size on zeolite-polyamide thin film nanocomposite membranes. *Langmuir*, **25**, 10139-10145.
- Liu, L.-F., Cai, Z.-B., Shen, J.-N., Wu, L.-X., Hoek, E.M.V., and Gao, C.-J. (2014). Fabrication and characterization of a novel poly(amide-urethane@imide) TFC reverse osmosis membrane with chlorine-tolerant property. *Journal of Membrane Science*, **469**, 397-409.
- Loeb, S., and Sourirajan, S. (1963). Sea water demineralization by means of an osmotic membrane. *Advances in Chemistry Series*, **38**, 117-132.
- Luo, T., Young, R., and Reig, P. (2015). Aqueduct projected water stress country rankings. Technical note. Washington, D.C.: World Resources Institute. Available online at: <http://www.wri.org/publication/aqueduct-projected-water-stress-country-rankings>.
- Peng, F., Jiang, Z., and Hoek, E.M.V. (2011). Tuning the molecular structure, separation performance and interfacial properties of poly(vinyl alcohol)-polysulfone interfacial composite membranes. *Journal of Membrane Science*, **368**, 26-33.
- Rahmawati, K., Ghaffour, N., Aubry, C., and Amy, G.L. (2012). Boron removal efficiency from Red Sea water using different SWRO/BWRO membranes. *Journal of Membrane Science*, **423-424**, 522-529.
- Rajaeian, B., Rahimpour, A., Tade, M.O., and Liu, S. (2013). Fabrication and characterization of polyamide thin film nanocomposite (TFN) nanofiltration membrane impregnated with TiO<sub>2</sub> nanoparticles. *Desalination*, **313**, 176-188.
- Razmjou, A., Mansouri, J. and Chen, V. (2011). The effects of mechanical and chemical modification of TiO<sub>2</sub> nanoparticles on the surface chemistry, structure and fouling performance of PES ultrafiltration membranes. *Journal of Membrane Science*, **378**, 73-84.
- Shintani, T., Matsuyama, H., and Kurata, N. (2009). Effect of heat treatment on performance of chlorine-resistant polyamide reverse osmosis membranes. *Desalination*, **247**, 370-377.
- Shultz, S., and Freger, V. (2018). In situ modification of membrane elements for improved boron rejection in RO desalination. *Desalination*, **431**, 66-72.



- Shultz, S., Bass, M., Semiat, R., and Freger, V. (2018). Modification of polyamide membranes by hydrophobic molecular plugs for improved boron rejection. *Journal of Membrane Science*, **546**, 165-172.
- Song, X., Qi, S., Tang, C.Y., and Gao, C. (2017). Ultra-thin, multi-layered polyamide membranes: Synthesis and characterization. *Journal of Membrane Science*, **540**, 10-18.
- Tagliabue, M., Reverberi, A.P., and Bagatin, R. (2014). Boron removal from water: needs, challenges and perspectives. *Journal of Cleaner Production*, **77**, 56-64.
- Tirafferri, A. (2014). Membrane-based water treatment to increase water supply. Retrieved from <http://www.colloid.ch/index.php?name=membranes>.
- Tu, K.L., Nghiem, L.D., and Chivas, A.R. (2010). Boron removal by reverse osmosis membranes in seawater desalination applications. *Separation and Purification Technology*, **75**, 87-101.
- Tu, K.L., Nghiem, L.D., and Chivas, A.R. (2011). Coupling effects of feed solution pH and ionic strength on the rejection of boron by NF/RO membranes. *Chemical Engineering Journal*, **168**, 700-706.
- Tu, K.L., Chivas, A.R., and Nghiem, L.D. (2013). Enhanced boron rejection by NF/RO membranes by complexation with polyols: Measurement and mechanisms. *Desalination*, **310**, 115-121.
- Turek, M., Bandura, B., and Dydo, P. (2008). Electrodialytic boron removal from SWRO permeate. *Desalination*, **223**, 17-22.
- Vatanpour, V., Safarpour, M., Khataee, A., Zarrabi, H., Yekavalangi, M.E., and Kaviani, M. (2017). A thin film nanocomposite reverse osmosis membrane containing amine-functionalized carbon nanotubes. *Separation and Purification Technology*, **184**, 135-143.
- Wada, Y., and Bierkens, M.F.P. (2014). Sustainability of global water use: past reconstruction and future projections. *Environmental Research Letters*, **9**, 104003.
- Wang, H., Zhang, Q., and Zhang, S. (2011). Positively charged nanofiltration membrane formed by interfacial polymerization of 3,3',5,5'-biphenyl tetraacyl chloride and piperazine on a poly(acrylonitrile) (PAN) support. *Journal of Membrane Science*, **378**, 243-249.

- Wang, T., Dai, L., Zhang, Q., Li, A., and Zhang, S. (2013). Effects of acyl chloride monomer functionality on the properties of polyamide reverse osmosis (RO) membrane. *Journal of Membrane Science*, **440**, 48-57.
- Wang, Z., Wang, P., Cao, J., Zhang, Y., Cheng, B., and Meng, J. (2017). A novel mixed matrix membrane allowing for flow-through removal of boron. *Chemical Engineering Journal*, **308**, 557-567.
- Werber, J.R., Bull, S.K., and Elimelech, M. (2017). Acyl-chloride quenching following interfacial polymerization to modulate the water permeability, selectivity, and surface charge of desalination membranes. *Journal of Membrane Science*, **535**, 357-364.
- Wolska, J., and Bryjak, M. (2013). Methods for boron removal from aqueous solutions – A review. *Desalination*, **310**, 18-24.
- Xie, W., Geise, G.M., Freeman, B.D., Lee, H.-S., Byun, G., and McGrath, J.E. (2012). Polyamide interfacial composite membranes prepared from *m*-phenylene diamine, trimesoyl chloride and a new disulfonated diamine. *Journal of Membrane Science*, **403-404**, 152-161.
- Ye, J., Liu, W., Cai, J., Chen, S., Zhao, X., Zhou, H., and Qi, L. (2011). Nanoporous anatase TiO<sub>2</sub> mesocrystals: Additive-free synthesis, remarkable crystalline-phase stability, and improved lithium insertion behavior. *Journal of the American Chemical Society*, **133**, 933-940.
- Yin, J., Kim, E.-S., Yang, J., and Deng, B. (2012). Fabrication of a novel thin-film nanocomposite (TFN) membrane containing MCM-41 silica nanoparticles (NPs) for water purification. *Journal of Membrane Science*, **423-424**, 238-246.
- Yu, S., Liu, M., Liu, X., and Gao, C. (2009). Performance enhancement in interfacially synthesized thin-film composite polyamide-urethane reverse osmosis membrane for seawater desalination. *Journal of Membrane Science*, **342**, 313-320.
- Zhang, Q., Zhang, C., Xu, J., Nie, Y., Li, S., and Zhang, S. (2016). Effect of poly(vinyl alcohol) coating process conditions on the properties and performance of polyamide reverse osmosis membranes. *Desalination*, **379**, 42-52.